



LED Color Tunable Fixture

Three Changeable Color Temperature Options




3000K (Warm White)

Comforting & Restful
provides for a relaxing atmosphere



4000K (Cool White)

Work Effectively
perfect for all workspace

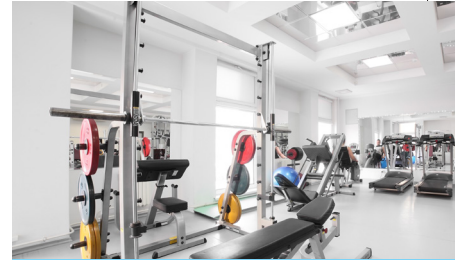

5000K (Super White)

Invigorating
great for commercial, displays, and reading

Your fixture can be adjustable through 3 color temperatures and allows you to choose your preferred light color.

Decorative Flush Mount (coming soon)



| Item# | Description | Watt | Lumen | Volt | Dim | Kevin | Hours | Feature | Dimension (in) |
|----------|--------------------------|------|-------|------|-------|-------------|-------|---------|----------------|
| 87728-SU | LFX/DC012/BN/SCT/15W/E/D | 14 | 1000 | 120 | Triac | 30K/40K/50K | 50000 | DL | 3.5(w) 12.0(d) |
| 87729-SU | LFX/DC014/BN/SCT/21W/E/D | 21 | 1600 | 120 | Triac | 30K/40K/50K | 50000 | DL | 3.8(w) 14.0(d) |
| 87730-SU | LFX/DC016/BN/SCT/24W/E/D | 24 | 1600 | 120 | Triac | 30K/40K/50K | 50000 | DL | 3.8(w) 16.0(d) |
| 87731-SU | LFX/DC018/BN/SCT/28W/E/D | 28 | 2000 | 120 | Triac | 30K/40K/50K | 50000 | | 3.8(w) 18.0(d) |

Surface Mount Downlights



| Item# | Description | Watt | Lumen | Volt | Dim | Kevin | Hours | Feature | Dimension (in) |
|----------|----------------------------|------|-------|------|-----------|-------------|-------|---------|----------------|
| 87738-SU | LFX/DISC/SCT/7.5"/15W/D/WH | 15 | 800 | 120 | Triac/Elv | 30K/40K/50K | 50000 | WL | 1.1(w) 6.3(d) |
| 87742-SU | LFX/DISC/SCT/7.5"/15W/D/BN | 15 | 800 | 120 | Triac/Elv | 30K/40K/50K | 50000 | WL | 1.1(w) 6.3(d) |

Surface Mount Downlights



| Item# | Description | Watt | Lumen | Volt | Dim | Kevin | Hours | Feature | Dimension (in) |
|----------|--------------------------|------|-------|------|-----------|-------------|-------|---------|----------------------|
| 81282-SU | LFX/MP/5R/10W/E/D/SCT/WH | 10 | 600 | 120 | Triac/Elv | 30K/40K/50K | 50000 | DL,ES | 0.6(w) 8.4(d) |
| 81283-SU | LFX/MP/5S/10W/E/D/SCT/WH | 10 | 600 | 120 | Triac/Elv | 30K/40K/50K | 50000 | DL,ES | 0.6(h) 4.4(w) 4.4(d) |
| 81284-SU | LFX/MP/7R/15W/E/D/SCT/WH | 15 | 900 | 120 | Triac/Elv | 30K/40K/50K | 50000 | DL,ES | 0.6(w) 7.4(d) |
| 81285-SU | LFX/MP/7S/15W/E/D/SCT/WH | 15 | 900 | 120 | Triac/Elv | 30K/40K/50K | 50000 | DL,ES | 0.6(h) 6.4(w) 6.4(d) |
| 81286-SU | LFX/MP/9R/18W/E/D/SCT/WH | 18 | 1100 | 120 | Triac/Elv | 30K/40K/50K | 50000 | DL,ES | 0.6(w) 9.0(d) |
| 81287-SU | LFX/MP/9S/18W/E/D/SCT/WH | 18 | 1100 | 120 | Triac/Elv | 30K/40K/50K | 50000 | DL,ES | 0.6(h) 9.0(w) 9.0(d) |

Downlight Retrofit Kits



| Item# | Description | Watt | Lumen | Volt | Dim | Kevin | Hours | Feature | Dimension (in) |
|----------|-----------------------------|------|-------|------|-------|-------------|-------|---------|----------------|
| 87720-SU | LFX/RDL/SCT/BF/4R/8W/E/D | 8 | 600 | 120 | Triac | 30K/40K/50K | 50000 | DL,ES | 2.7(w) 5.1(d) |
| 87721-SU | LFX/RDL/SCT/BF/5/6R/15W/E/D | 15 | 1125 | 120 | Triac | 30K/40K/50K | 50000 | DL,ES | 2.7(w) 5.1(d) |
| 87723-SU | LFX/RDL/SCT/5/6R/15W/E/D | 15 | 1125 | 120 | Triac | 30K/40K/50K | 50000 | DL,ES | 2.8(w) 7.4(d) |

DIM = Dimmable

DL = Rated Damp Location

WL = Rated Wet Location

DLC = Design Lights Consortium

ES = Energy Star



Ultra Slim Downlights

| Item# | Description | Watt | Lumen | Volt | Dim | Kevin | Hours | Feature | Dimension (in) |
|----------|--------------------|------|-------|------|-----------|-------------|-------|---------|----------------------|
| 87700-SU | LFX/SDL/SCT/4R/11W | 11 | 700 | 120 | Triac/Elv | 30K/40K/50K | 50000 | DL | 1.0(w) 4.9(d) |
| 87701-SU | LFX/SDL/SCT/4S/11W | 11 | 700 | 120 | Triac/Elv | 30K/40K/50K | 50000 | DL | 0.9(h) 4.7(w) 4.7(d) |
| 87702-SU | LFX/SDL/SCT/6R/14W | 14 | 950 | 120 | Triac/Elv | 30K/40K/50K | 50000 | DL | 1.0(w) 6.9(d) |
| 87703-SU | LFX/SDL/SCT/6S/14W | 14 | 950 | 120 | Triac/Elv | 30K/40K/50K | 50000 | DL | 1.8(h) 6.7(w) 6.7(d) |
| 87704-SU | LFX/SDL/SCT/8R/18W | 18 | 1100 | 120 | Triac/Elv | 30K/40K/50K | 50000 | DL | 1.0(w) 8.9(d) |



Commercial Remodel

| Item# | Description | Watt | Lumen | Volt | Dim | Kevin | Hours | Feature | Dimension (in) |
|----------|--------------------------|----------|----------------|---------|-------|-------------|-------|---------|----------------|
| 87732-SU | LFX/CRD/SCT/6R/MW/D/6" | 9/13/19 | 750/1050/1500 | 120-277 | 0-10v | 30K/35K/40K | 50000 | WL,ES | 4.5(w) 8.4(d) |
| 87733-SU | LFX/CRD/SCT/8R/MW/D/8" | 16/23/29 | 1500/2000/2500 | 120-277 | 0-10v | 30K/35K/40K | 50000 | WL,ES | 4.8(w) 10.0(d) |
| 87734-SU | LFX/CRD/SCT/10R/MW/D/10" | 21/29/37 | 2000/2500/3200 | 120-277 | 0-10v | 30K/35K/40K | 50000 | WL,ES | 5.2(w) 11.4(d) |



Linear Surface Mount

| Item# | Description | Watt | Lumen | Volt | Dim | Kevin | Hours | Feature | Dimension (in) |
|----------|-----------------------|----------|----------------|---------|-------|-------------|-------|---------|-----------------------|
| 87724-SU | LFX/EC/4'/SCT/MW/D/MV | 18/25/30 | 2484/3350/3900 | 120-277 | 0-10v | 35K/40K/50K | 50000 | DL,DLC | 3.6(h) 3.3(w) 47.3(d) |
| 87725-SU | LFX/EC/8'/SCT/MW/D/MV | 38/46/54 | 5244/6164/7020 | 120-277 | 0-10v | 35K/40K/50K | 50000 | DL,DLC | 3.6(h) 3.3(w) 94.2(d) |



Flat Panel Mini

| Item# | Description | Watt | Lumen | Volt | Dim | Kevin | Hours | Feature | Dimension (in) |
|----------|-------------------------------|----------|----------------|---------|-------|-------------|-------|---------|------------------------|
| 87745-SU | LFX/1X1/SCT/15W/D/MV/0-10V | 15 | 1050/1320/1200 | 100-277 | 1-10v | 35K/40K/50K | 50000 | ETL | 0.8(h) 11.8(w) 11.8(d) |
| 85462-SU | LFX/1X4/SCT/MW/D/MV/0-10V/2PK | 20/30/40 | 3600/4520/4000 | 100-277 | 0-10v | 35K/40K/50K | 50000 | UL | 0.4(h) 11.8(w) 47.8(d) |
| 85460-SU | LFX/2X2/SCT/MW/D/MV/0-10V/2PK | 20/30/40 | 3296/4120/3583 | 120-277 | 0-10v | 35K/40K/50K | 50000 | UL | 0.4(h) 23.8(w) 23.8(d) |
| 85461-SU | LFX/2X4/SCT/MW/D/MV/0-10V/2PK | 30/40/52 | 4646/5804/5050 | 120-277 | 0-10v | 35K/40K/50K | 50000 | UL | 0.4(h) 23.8(w) 47.8(d) |



Recessed Troffer

| Item# | Description | Watt | Lumen | Volt | Dim | Kevin | Hours | Feature | Dimension (in) |
|----------|---------------------|----------|----------------|---------|-------|-------------|-------|---------|------------------------|
| 85214-SU | LFX/2X2/SCT/MW/MV/D | 20/25/30 | 2640/3250/3750 | 120-277 | 0-10v | 35K/40K/50K | 50000 | DL,DLC | 2.8(h) 23.8(w) 23.8(d) |
| 85215-SU | LFX/2X4/SCT/MW/MV/D | 25/30/34 | 3350/3375/3400 | 120-277 | 0-10v | 35K/40K/50K | 50000 | DL,DLC | 2.8(h) 23.8(w) 47.8(d) |

DIM = Dimmable

DL = Rated Damp Location

WL = Rated Wet Location

DLC = Design Lights Consortium

ES = Energy Star

