

# ULTRA SLIM LED DOWNLIGHTS

More Slim Than Traditional Downlight, Suitable Tight Space Ceiling

No Housing Required



Metal Junction Box

0.9" Thickness

Snap Spring for Easy Mounting

Dimmable

12" Cable

Save Energy, Save Money

Eco-Friendly

Long Life Span

Easy Installation



## 4" & 6" Round Downlights


	Item#	Description	Watt	Eq.W	Color	Lumens	Hours	Case	L	W	H	
4" Downlights	82073-SU	LFX/SDL/4R/10W/D/E/30K	10	50	3000K	650	36,000	12	4.7"	4.7"	0.9"	
	82072-SU	LFX/SDL/4R/10W/D/E/40K	10	50	4000K	650	36,000	12	4.7"	4.7"	0.9"	
6" Downlights	82074-SU	LFX/SDL/6R/12W/D/E/30K	12	75	3000K	850	36,000	12	6.8"	6.8"	0.9"	
	82077-SU	LFX/SDL/6R/12W/D/E/40K	12	75	4000K	850	36,000	12	6.8"	6.8"	0.9"	



## 4" & 6" Square Downlights

	Item#	Description	Watt	Eq.W	Color	Lumens	Hours	Case	L	W	H	
4" Downlights	82075-SU	LFX/SDL/4S/10W/D/E/30K	10	50	3000K	650	36,000	12	4.7"	4.7"	0.9"	
	82078-SU	LFX/SDL/4S/10W/D/E/40K	10	50	4000K	650	36,000	12	4.7"	4.7"	0.9"	
6" Downlights	82076-SU	LFX/SDL/6S/12W/D/30K	12	75	3000K	850	36,000	12	6.7"	6.7"	0.9"	
	82079-SU	LFX/SDL/6S/12W/D/40K	12	75	4000K	850	36,000	12	6.7"	6.7"	0.9"	

## Simple Installation Guide

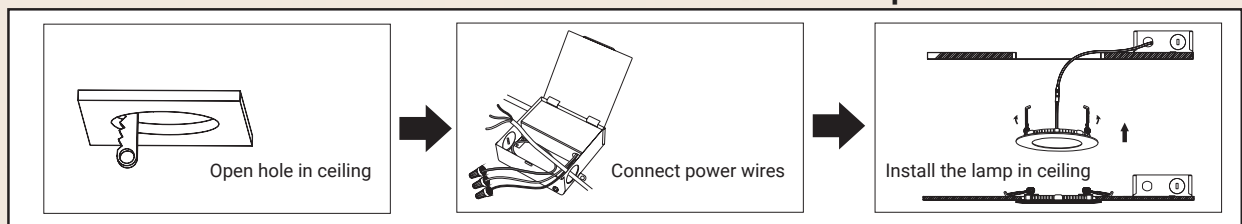

**sunlite**  
WWW.SUNLITE.COM



718.768.7000  
Toll - Free  
800.605.BULB



718.768.0970



NYC Warehouse  
744 Clinton Street  
Brooklyn, NY 11231

Florida Warehouse  
3698 1/2 NW 16th. Bay C  
Lauderhill, FL 33311

Specifications may change without notice. We are not responsible for any typographical errors.