


85464-SU

sunlite

LFX/EC/2'/MW/4SCT/EM

2-Foot LED Strip Light Fixture, Power Tunable 15W/20W/25W, 120-277 Volts, 1950/2600/3250 Lumens, Color Tunable 30K/35K/40K/50K, Dimmable, ETL Listed, Built-In Battery Backup

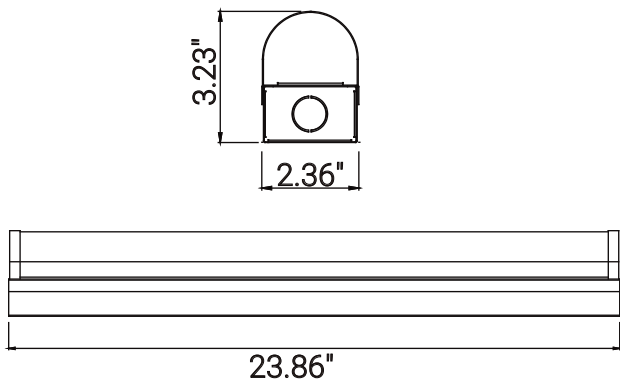

Project: _____
Type: _____
Catalog #: _____
Date: _____
Comments: _____

Technical Specifications

Photometrics

Lumen	1950/2600/3250
Emitted Color	CCT Selectable
Color Temp	30K/35K/40K/50K
Color Rendering Index (CRI)	0
Beam Spread	110°
Lifespan	50000

Electrical

Watt	15/20/25
Input Voltage	120-277
Power Factor	0.9
Dimmable	0-10V Low Voltage

Ratings / Certifications

Safety Certification	ETL - Damp Location
DLC	S-RP4D0L
Operating Temperature	-4°F - 104°F
Warranty	5 Years

Construction

Fixture Material	Iron & Acrylic
Fixture Finish	White
Lens Material	PMMA
Lens Finish	White
Shape	Linear
Mounting	Surface